



Feature:



Certificates:



Feature:

Aluminum housing in silver / customized color

Clear / milky / stripe PC diffuser



Cable come out from side

IP65

SPI control



1led/pix, 2led/pix, 3led/pixl, 6led/pix or customized

Hot plug

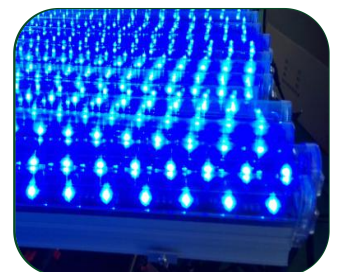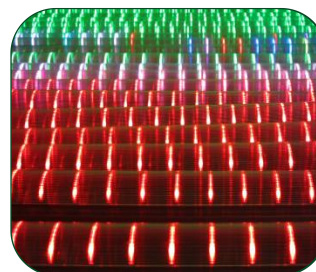

Product size and Parameters

37x60mm SPI led tube Unit: mm

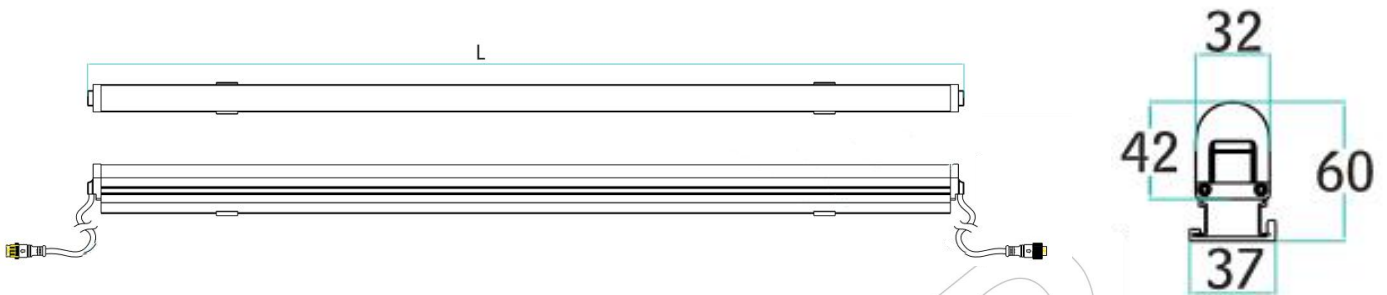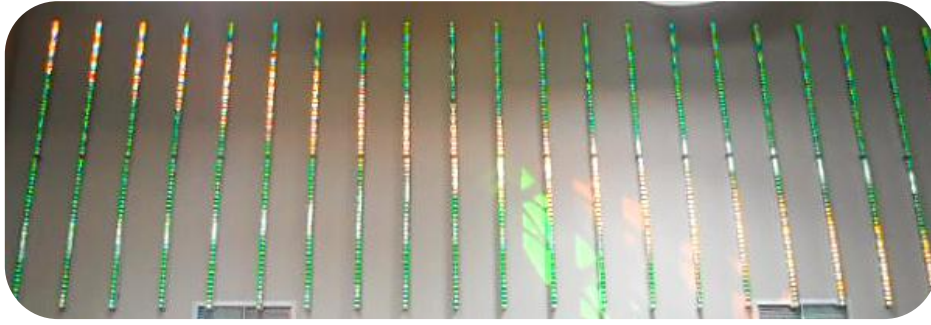



PRODUCT SPECIFICATION

Model NO.	LED-LT3760SPI3216	LED-LT3760SPI1608	LED-LT3760SPI4816	LED-LT3760SPI2408
Dimension	1000x37x60mm	500x37x60mm	1000x37x60mm	500x37x60mm
LED type and QTY	32 pcs SMD RGB 5050	16 pcs SMD RGB 5050	48 pcs SMD RGB 5050	24 pcs SMD RGB 5050
Pixel QTY	16 PIX	8 PIX	16 PIX	8 PIX
Emitting angle	120 degree	120 degree	120 degree	120 degree
Color	RGB full color	RGB full color	RGB full color	RGB full color
Operating Voltage	DC 12V	DC 12V	DC 12V	DC 12V
Power	MAX=12W	MAX=6W	MAX=12W	MAX=6W
Control Protocol	SPI			
Control Mode	Artnet / DVI / Standalone Control			
Material	Aluminum housing + PC diffuser			
Housing Color	Silver, White or Black			
Diffuser Color	Clear Stripe / Milky diffuser			
Protection	IP65			
LED Source Life	50,000 hours, based on test data of LED manufacturer			
Temperature	-4°F to 122°F (-20°C to 50°C) operating temperature			
Humidity Range	0 to 95% non-condensing			

Remark: Specifications are subject to change without notice.

Product size and Parameters


56x64mm SPI led tube Unit:mm

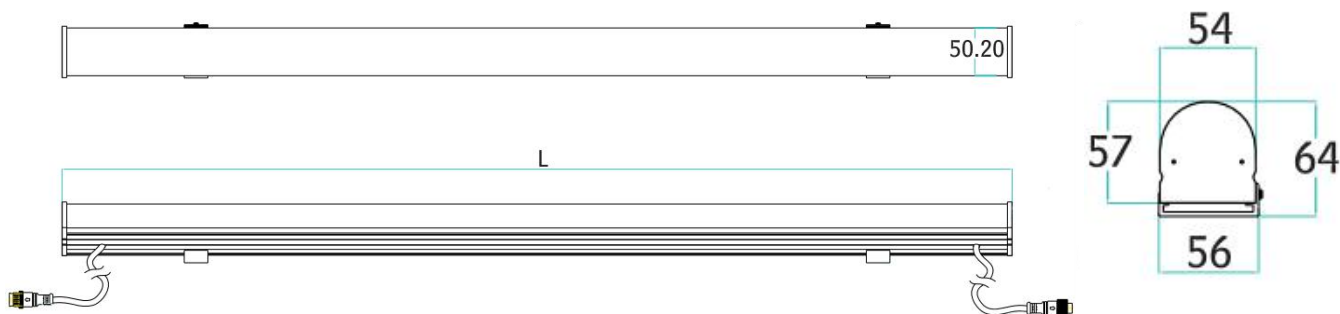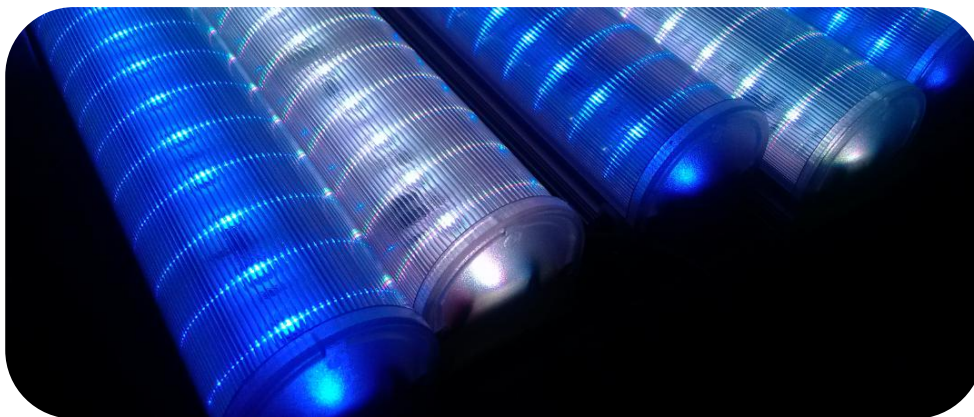


PRODUCT SPECIFICATION

Model NO.	LED-LT5664SPI3216	LED-LT5664SPI1608	LED-LT5664SPI4816	LED-LT5664SPI2408
Dimension	1000x56x64mm	500x56x64mm	1000x56x64mm	500x56x64mm
LED type and QTY	32 pcs SMD RGB 5050	16 pcs SMD RGB 5050	48 pcs SMD RGB 5050	24 pcs SMD RGB 5050
Pixel QTY	16 PIX	8 PIX	16 PIX	8 PIX
Emitting angle	120 degree	120 degree	120 degree	120 degree
Color	RGB full color	RGB full color	RGB full color	RGB full color
Operating Voltage	DC 12V	DC 12V	DC 12V	DC 12V
Power	MAX=12W	MAX=6W	MAX=12W	MAX=6W
Control Protocol	SPI			
Control Mode	Artnet / DVI / Standalone Control			
Material	Aluminum housing + PC diffuser			
Housing Color	Silver, White or Black			
Diffuser Color	Milky / Clear Stripe / Clear diffuser			
Protection	IP65			
LED Source Life	50,000 hours, based on test data of LED manufacturer			
Temperature	-4°F to 122°F (-20°C to 50°C) operating temperature			
Humidity Range	0 to 95% non-condensing			


Remark: Specifications are subject to change without notice.

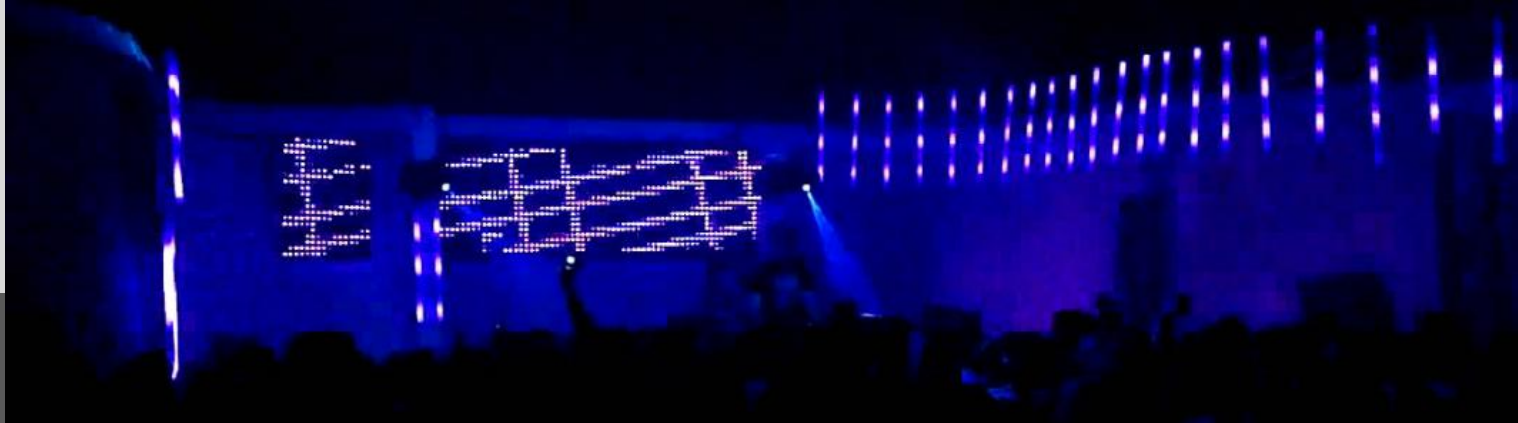

Wiring Diagram

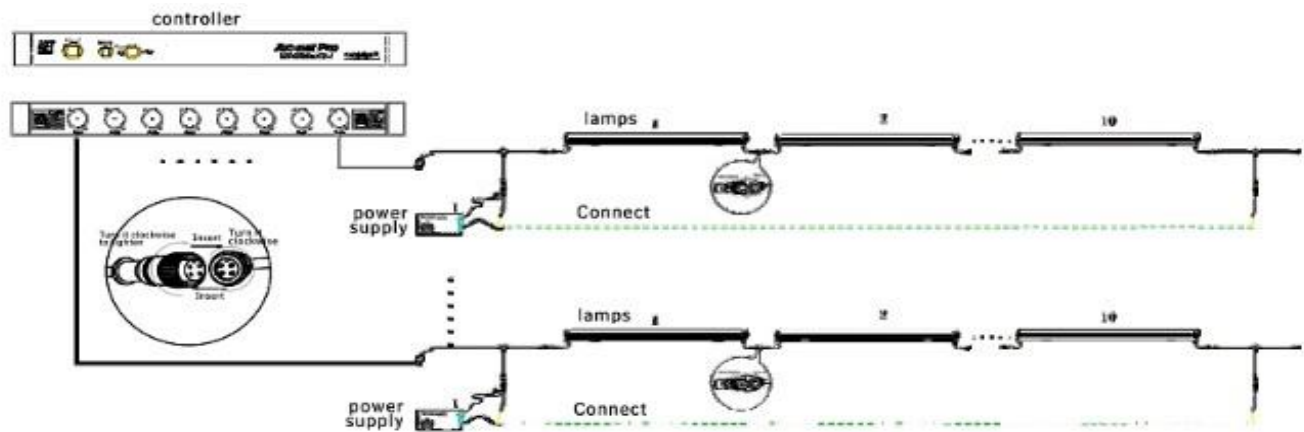

Accessories

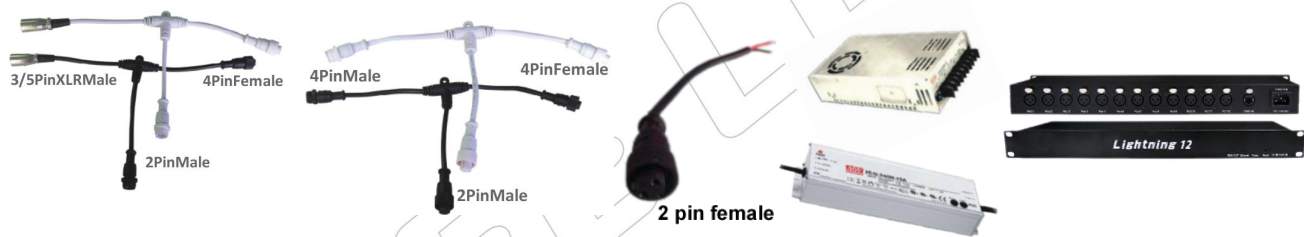

Model Definition

