



Feature:



Certificates:



Feature: >>>

Aluminum housing base in silver / customized color

Clear / milky / stripe PC diffuser



Cable come out from side or bottom

IP65 waterproof

Standard DMX 512 control, max 44frames/second


1led/pix, 2led/pix, 3led/pixl, 6led/pix or customized

Hot plug

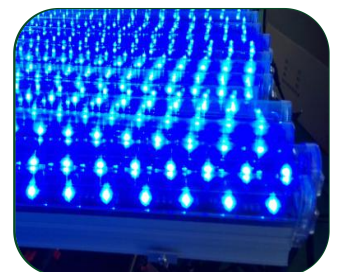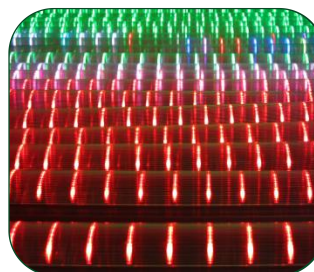

Product size and Parameters

37x60mm dmx led tube Unit: mm

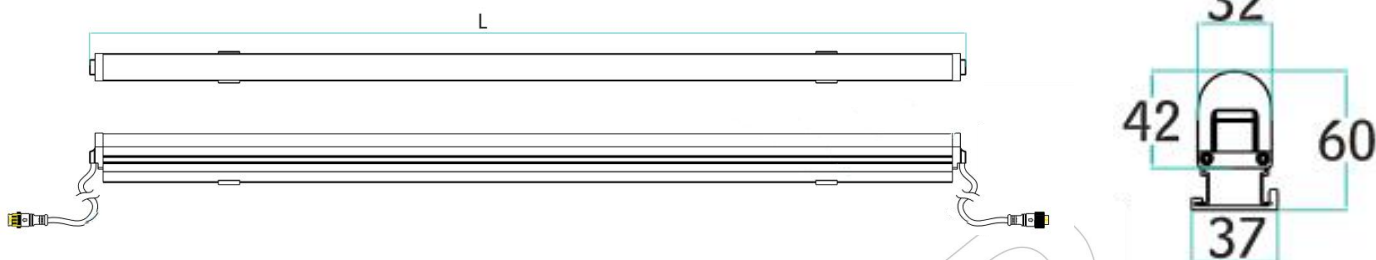


PRODUCT SPECIFICATION

Model NO.	LED-LT3760DMX3216	LED-LT3760DMX1608	LED-LT3760DMX4816	LED-LT3760DMX2408
Dimension	1000x37x60mm	500x37x60mm	1000x37x60mm	500x37x60mm
LED type and QTY	32 pcs SMD RGB 5050	16 pcs SMD RGB 5050	48 pcs SMD RGB 5050	24 pcs SMD RGB 5050
Pixel QTY	16 PIX	8 PIX	16 PIX	8 PIX
Emitting angle	120 degree	120 degree	120 degree	120 degree
Color	RGB full color	RGB full color	RGB full color	RGB full color
Operating Voltage	DC 12V	DC 12V	DC 12V	DC 12V
Power	MAX=12W	MAX=6W	MAX=12W	MAX=6W
Control Protocol	DMX512			
Address Setting	Automatically / Manually			
Control Mode	DMX Artnet / DMX DVI / Standalone Control			
Material	Aluminum housing + PC diffuser			
Housing Color	Silver, White or Black			
Diffuser Color	Clear Stripe / Milky diffuser			
Protection	IP65			
LED Source Life	50,000 hours, based on test data of LED manufacturer			
Temperature	-4F to 122F (-20°C to 50°C) operating temperature			
Humidity Range	0 to 95% non-condensing			

Remark: Specifications are subject to change without notice.

Product size and Parameters


56x64mm dmx led tube Unit:mm

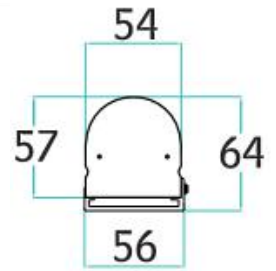


PRODUCT SPECIFICATION

Model NO.	LED-LT5664DMX3216	LED-LT5664DMX1608	LED-LT5664DMX4816	LED-LT5664DMX2408
Dimension	1000x56x64mm	500x56x64mm	1000x56x64mm	500x56x64mm
LED type and QTY	32 pcs SMD RGB 5050	16 pcs SMD RGB 5050	48 pcs SMD RGB 5050	24 pcs SMD RGB 5050
Pixel QTY	16 PIX	8 PIX	16 PIX	8 PIX
Emitting angle	120 degree	120 degree	120 degree	120 degree
Color	RGB full color	RGB full color	RGB full color	RGB full color
Operating Voltage	DC 12V	DC 12V	DC 12V	DC 12V
Power	MAX=12W	MAX=6W	MAX=12W	MAX=6W
Control Protocol	DMX512			
Address Setting	Automatically / Manually			
Control Mode	DMX Artnet / DMX DVI / Standalone Control			
Material	Aluminum housing + PC diffuser			
Housing Color	Silver, White or Black			
Diffuser Color	Milky / Clear Stripe / Clear diffuser			
Protection	IP65			
LED Source Life	50,000 hours, based on test data of LED manufacturer			
Temperature	-4F to 122F (-20°C to 50°C) operating temperature			
Humidity Range	0 to 95% non-condensing			


Remark: Specifications are subject to change without notice.

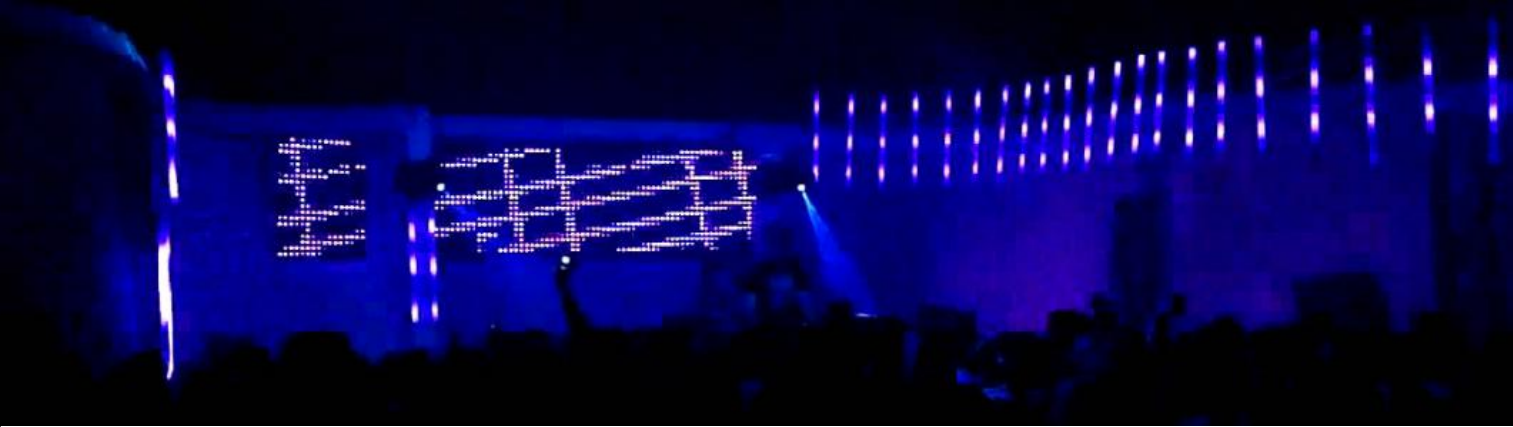

Wiring Diagram

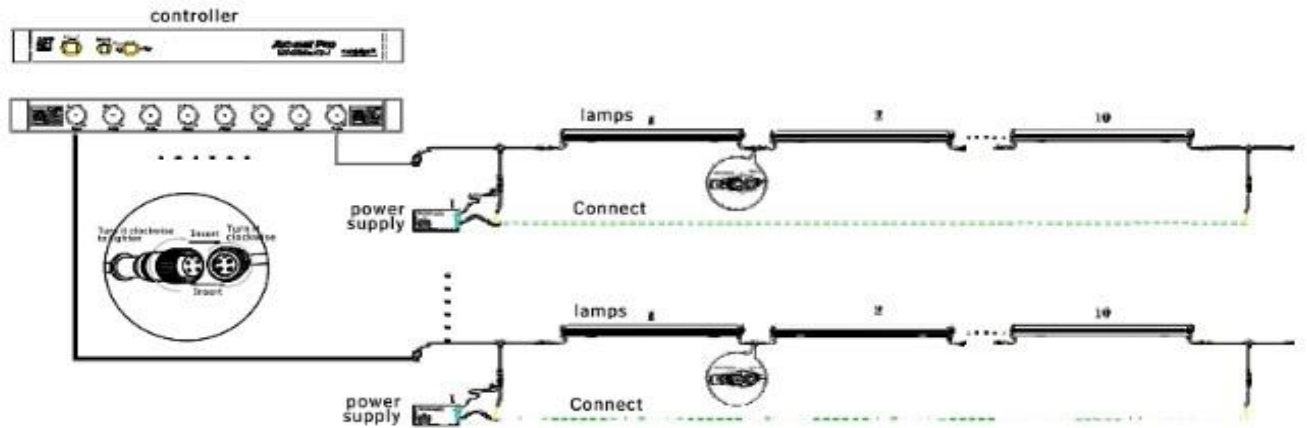


Accessories

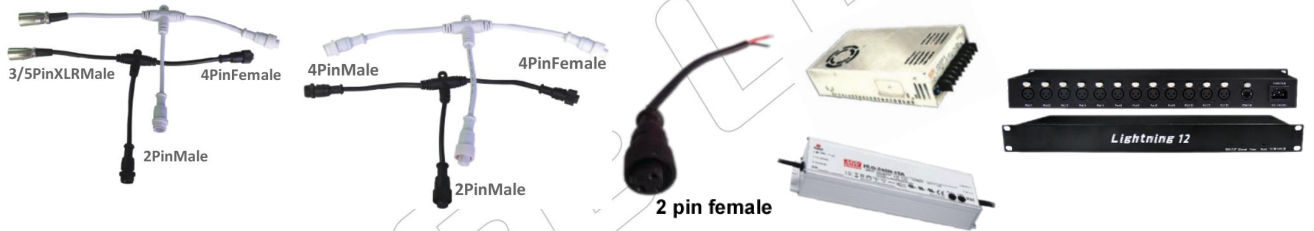

Model Definition

LED- LT 3760 DMX 32 16 - 03 01

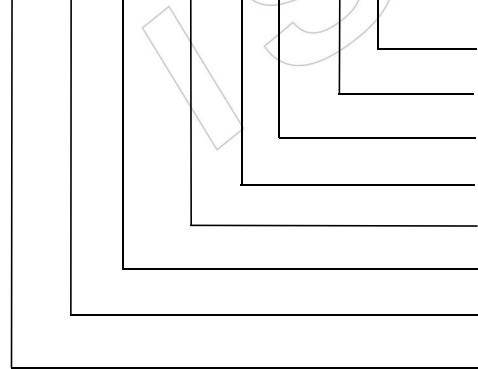

- 01=Diffuser Color, 01 in milky, 02 in clear, 03 in clear stripe
- 03=Housing Color, 01 in white, 02 in black, 03 in silver
- 16=Pixel Quantity
- 32=LED Quantity
- DMX=Control Protocol
- 3760=width & height (mm)
- LT=Linear Tube
- LED=ISEELED



Bld 12, Fuqiao Industrial Park, Fuyong,
Bao'an, Shenzhen, CN



International hotline:
86-755-3697 8198



E-mail: info@iseeled.com
Web: www.iseeled.com