

LED Pixel Light – High Power Series

Round DMX LED Pixel light, Club, stage, Building

V2.1

LED Pixel Light – High Power Series



Feature:



Certificates:



Feature:

High Power 1-4W cree LED/Helio LED is assembled in the High Power led pixel light

Size 64mm, 80mm , 78mm available

Flexible powerful led string for surface of building


Standard DMX 512 control, 44frames/second

DMX address can be set manually , automatically or customized


Protections: short circuit, over current , over temperature

With working life-span at least 50,000hrs


Application: Outline profile decoration, Interior design for clubs, etc

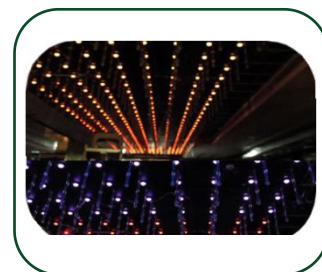


Product size and Parameters

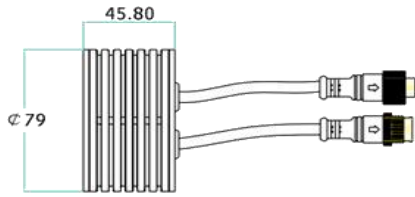


80mm DMX
LED Pixel Light

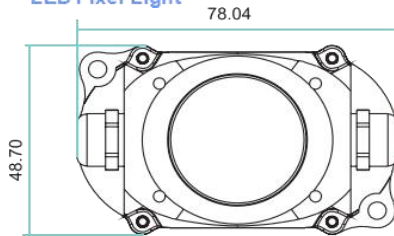

78mm DMX LED Pixel Light

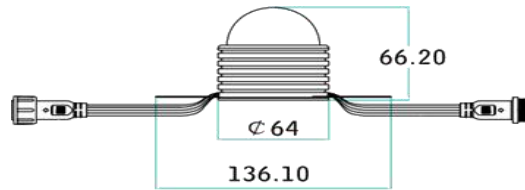

64mm 3W DMX
LED Pixel Light

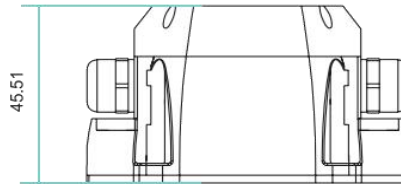

Unit: mm


PRODUCT SPECIFICATION

Model NO.	LED-HP80DMX0101	LED-HP64DMX0101	LED-HP64DMX0101	LED-HP78DMX0101
LED type and QTY	3W High Power RGB in one LED	3W High Power RGB in one LED	4W High Power RGBW in one LED	4W High Power RGBW in one LED
Emitting angle	70degree	120 degree	10*75 degree/ 120 degree	10*75 degree
Color	RGB full color	RGB full color	RGB full color	RGB full color
Operating Voltage	DC 12V	DC 12V	DC 24V	DC12- 24V
Power	MAX=3W	MAX=3W	MAX=4W	MAX=4W
Control Protocol	DMX512			
Control Mode	DMX Artnet / DMX DVI / Standalone Control			
Dimension (housing)	80MM diameter	64MM diameter	64MM diameter	78MM diameter
Housing Material	Aluminum	Aluminum	Aluminum	Aluminum
LED Source Life	50,000 hours, based on test data of LED manufacturer			
Temperature	-4F to 122F (-20°C to 50°C) operating temperature			
Humidity Range	0 to 95% non-condensing			
Protection	IP65	IP65	IP65	IP65


Remark: Specifications are subject to change without notice.




Wiring Diagram

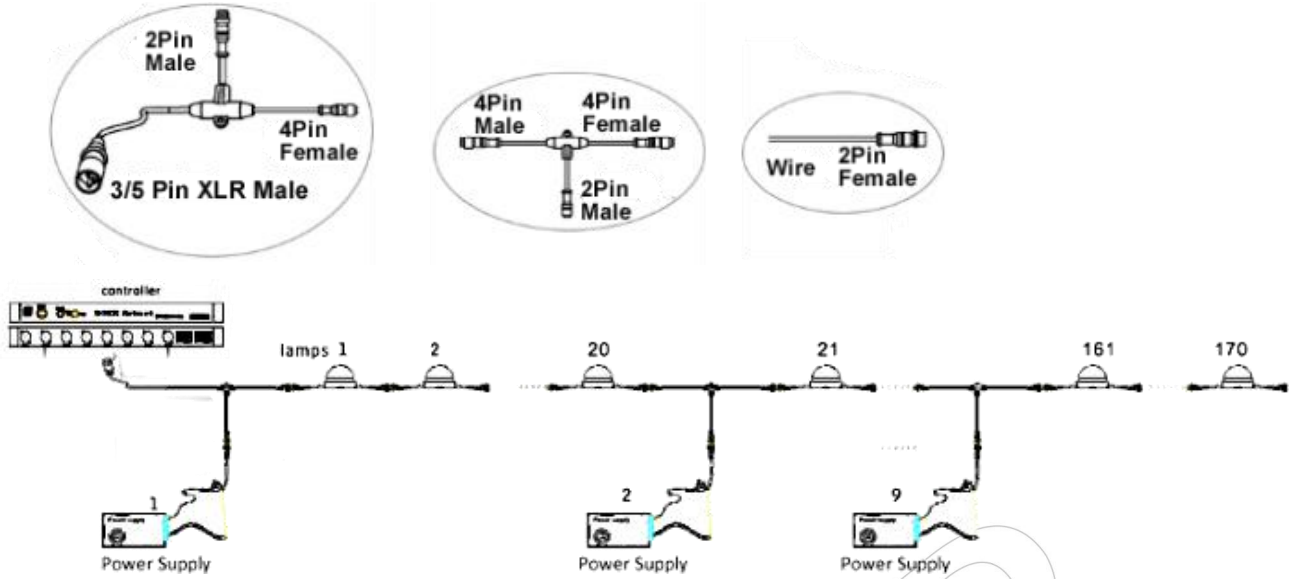

Accessories

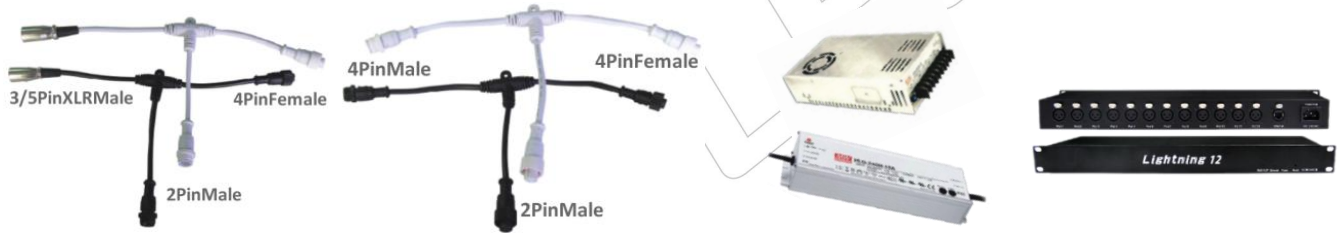

Model Definition

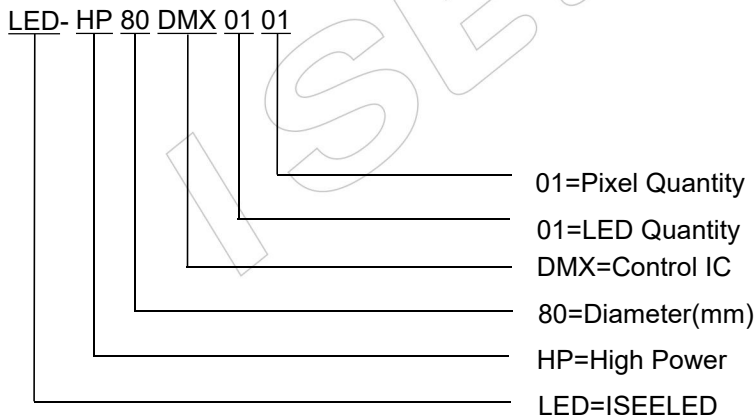

Remark: Specifications are subject to change without notice.



Bld 12, Fuqiao Industrial Park, Fuyong, Bao'an, Shenzhen, CN



International hotline:
86-755-3697 8198



E-mail: info@iseeled.com
Web: www.iseeled.com