


Feature:



Certificates:

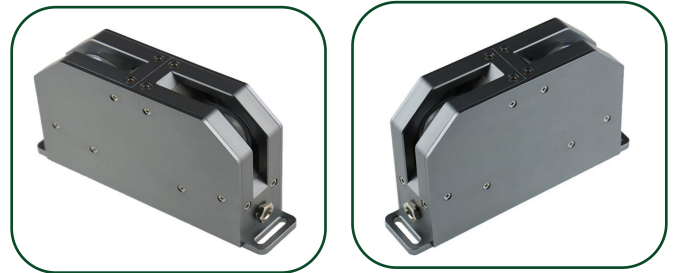

Feature:

Slim design L200mm*W47mm*H113mm

Aluminum housing in gray color and high

Protocol: Standard DMX 512 control, auto-addressing

Beam angle: 180degree

LED type: Cree Led

Color type: RGB color or single color


Input Voltage: DC12V/24V, AC220V

IP67 waterproof

Application: Shinning the window



Product size and Parameters

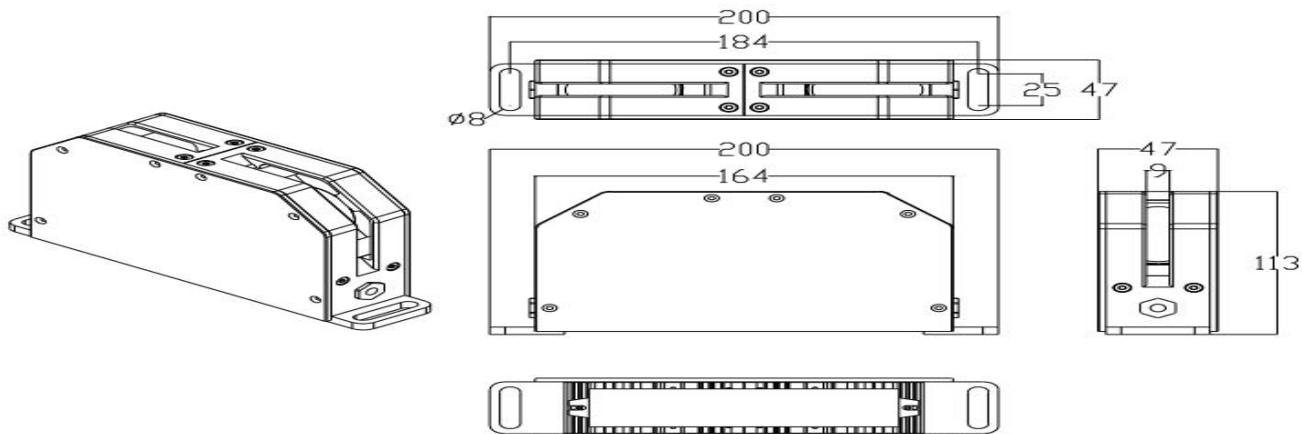

Unit: mm


PRODUCT SPECIFICATION

LED, Input and Control	Model NO.	LED-WL47113DMX0601	LED-WL47113DMX0601
	LED type and QTY	6pcs high power cree led	6pcs high power cree led
	Emitting angle	180 degrees	180 degrees
	Beam Width	15cm-20cm	
	Light Length	6m-10m	
	Color	RGB full color	Single color
	Operating Voltage	DC 12V/24V, AC220V	DC12V/24V, AC220V
	Power	12W	12W
	Current	350mA-700mA	
	Control Protocol	Standard DMX512	
Physic and Environment	Control Mode	DMX Artnet / DMX DVI / Standalone Control	
	Address Setting	Automatically	
	Dimension (housing)	200*47*113mm	200*47*113mm
	Housing Material	Aluminum housing in gray color	
	LED Source Life	50,000 hours, based on test data of LED manufacturer	
	Temperature	-40°C to 55°C) Working temperature	
	Protection	IP67	IP67
	Package		
Certificates	CE, ROHS		


Remark: Specifications are subject to change without notice.




Wiring Diagram

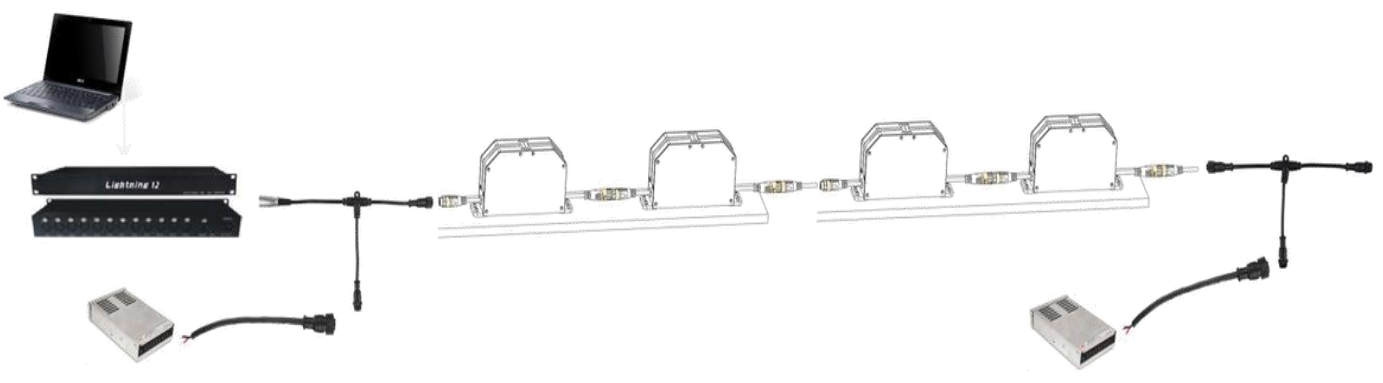

Accessories

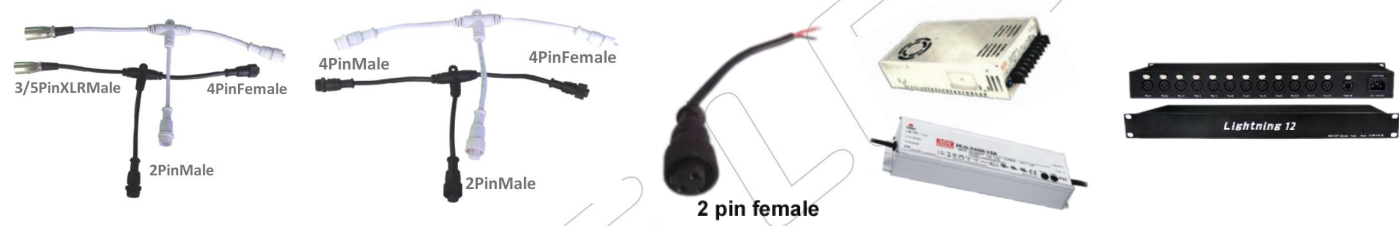

Model Definition

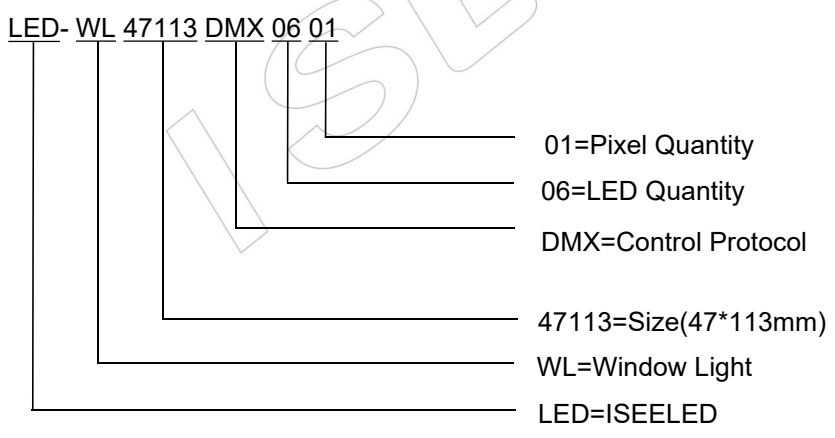

Bld 12, Fuqiao Industrial Park, Fuyong,
Bao'an, Shenzhen, CN



International hotline:
86-755-3697 8198



E-mail: info@iseeled.com
Web: www.iseeled.com