

Feature:



Certificates:



Feature:

Dimension: 0.5m, 1m, 1.5m, 2m length

Clear PC cover giving 360° viewing

Standard DMX 512 control, 44frames/second, manual or auto-addressing customized




3D pixel mapping to set on the software programming

Protections: short circuit, over current , over temperature

With working life-span at least 50,000hrs


IP65 waterproof with good design of the housing

Application: 3D Vision figure, Interior design for clubs, museums, themed environments, Stage video elements for intimate or large concert productions, Television awards and game shows, Video Art projects

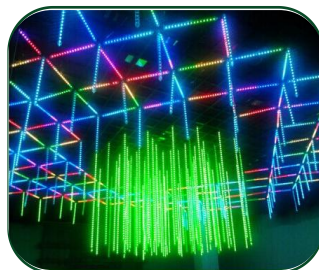

Product size and Parameters

Unit:mm

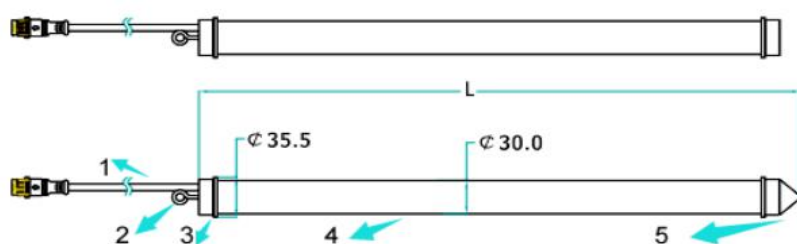

No.	Name
1	External wire
2	Rings for bearing
3	Transparent plug (upper)
4	Transparent tube
5	Transparent plug (bottom)

PRODUCT SPECIFICATION

Model NO.	LED-3DT30DMX3208	LED-3DT30DMX6416	LED-3DT30DMX9624	LED-3DT30DMX12832
Diameter	30mm	30mm	30mm	30mm
Length	500mm	1000mm	1500mm	2000mm
Color	RGB SMD RGB 5050	RGB SMD RGB 5050	RGB SMD RGB 5050	RGB SMD RGB 5050
LED QTY	32LEDs	64LEDs	96LEDs	128LEDs
Pixel QTY	8Pixels	16Pixels	24Pixels	32Pixels
Tube Qty/Universe	20PCS	10PCS	7PCS	5PCS
Control Protocol	Standard DMX512			
Address setting	Manually	Manually	Manually	Manually
Operating Voltage	DC15V	DC15V	DC15V	DC15V
Power	8W	15W	24W	30W
LED Source Life	50,000 hours, based on test data of LED manufacturer			
Housing	Clear cover			
Temperature	-4°F to 122°F (-20°C to 50°C) operating temperature			
Humidity Range	0 to 95% non-condensing			
Protection	IP65	IP65	IP65	IP65
Weight	0.122kg/pcs	0.244kg/pcs	0.345kg/pcs	0.467kg/pcs

- Note**
1. diameter 15mm, 30mm, 50mm , 3D LED Vertical tube is available
 2. Comparing with DMX512 protocol , if you need economic solution, we recommend SPI protocol


Remark: Specifications are subject to change without notice.

Related Accessories



Wiring

Diagram

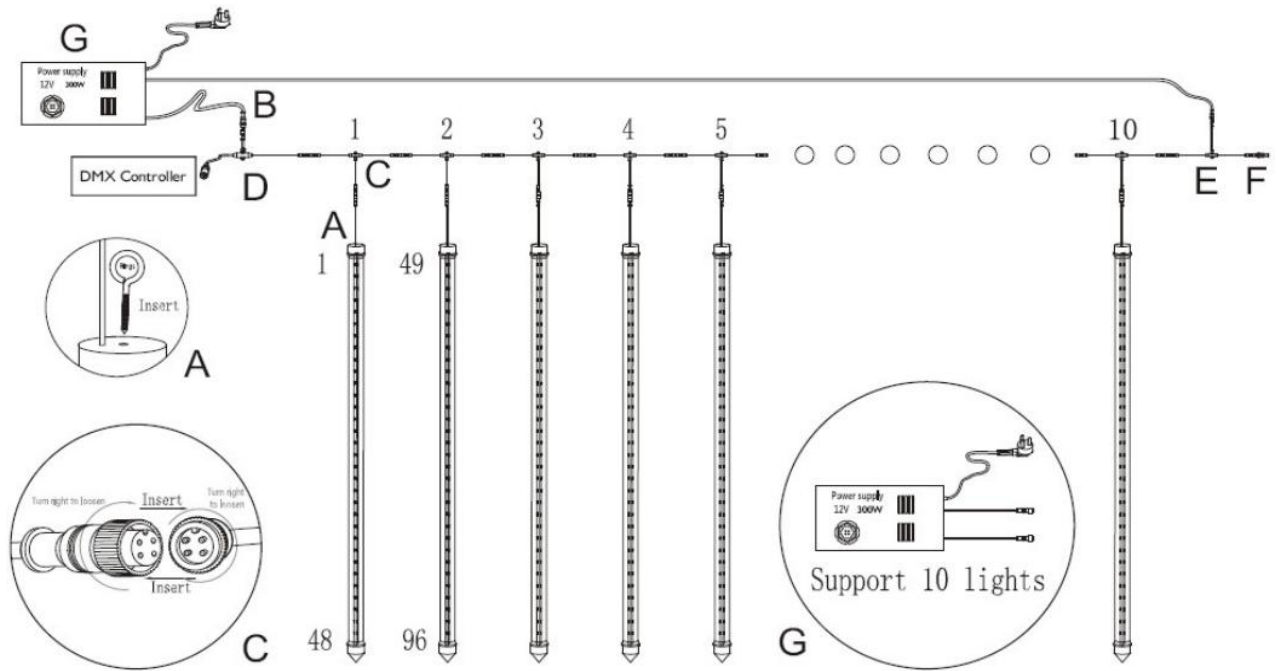

Accessories



Model Definition

LED- 3DT 30 DMX 6416

16=Pixel Quantity

64=LED Quantity

DMX=Control Protocol

30=Diameter(mm)

3DT=3D Tube

LED=ISEELED



Bld 12, Fuqiao Industrial Park, Fuyong,
Bao'an, Shenzhen, CN



International hotline:

86-755-3697 8198



E-mail: info@iseeled.com

Web: www.iseeled.com