

Linear Waterproof LED Wall Washer

LED Light - Linear Waterproof LED Wall Washer Light



Feature:



Certificates:



Feature:

Tight waterproof structure

International standard DMX 512 Control


Optional on Optic Lens

Detachable bracket for easy installation and adjustable the wall washer angle

Use 3W power LED, high efficient heat conductivity to ensure long lifespan


DMX 512 dimming with constant current driver
RGB/RGBW dimming available

Application: adapted for all kinds of led lighting control with dmx 512 protocol way.

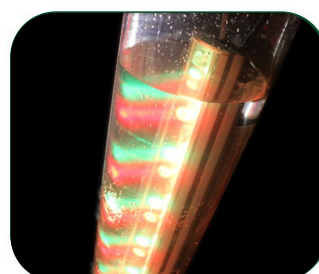


Product size


5525 Type-E

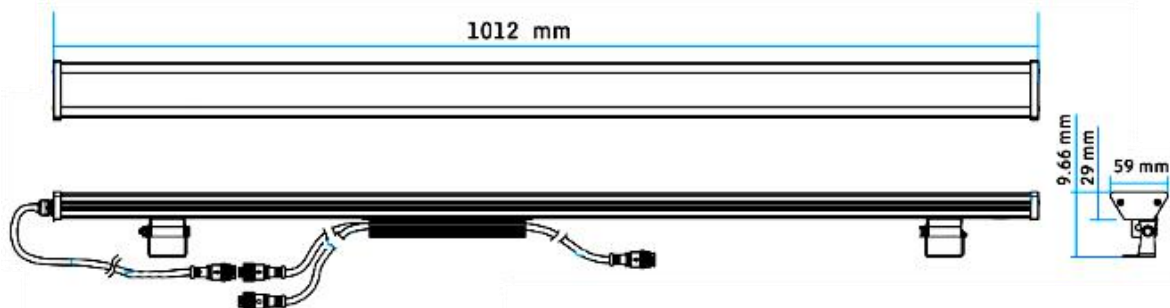


6269 Type-B

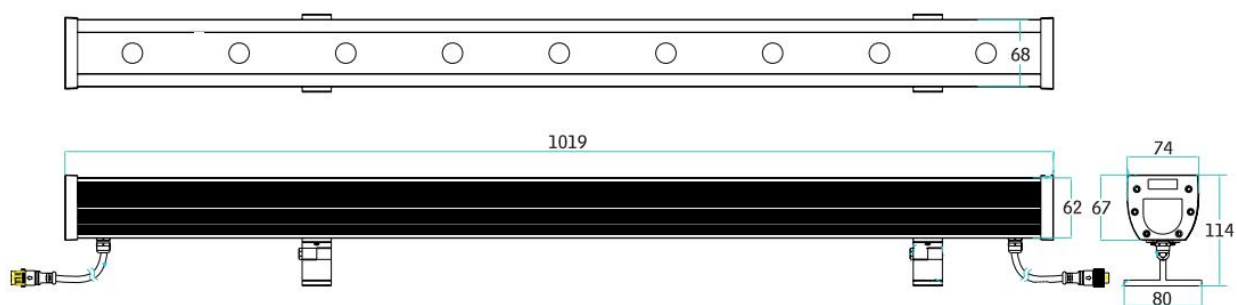

8466 Type-H

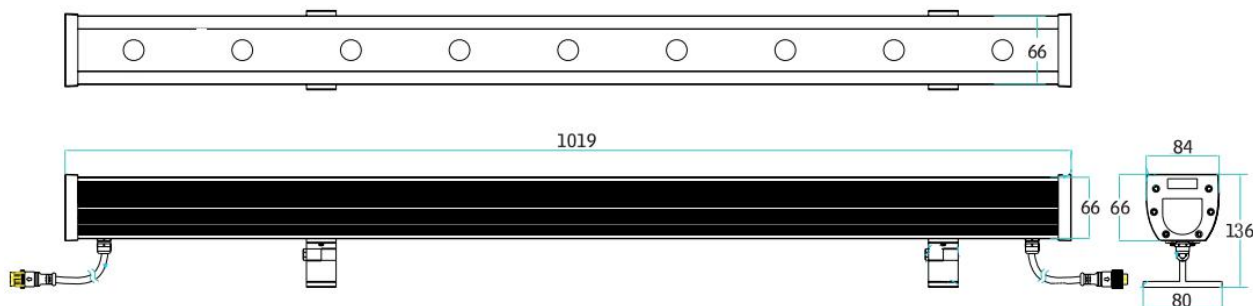

7267 Type-IP68

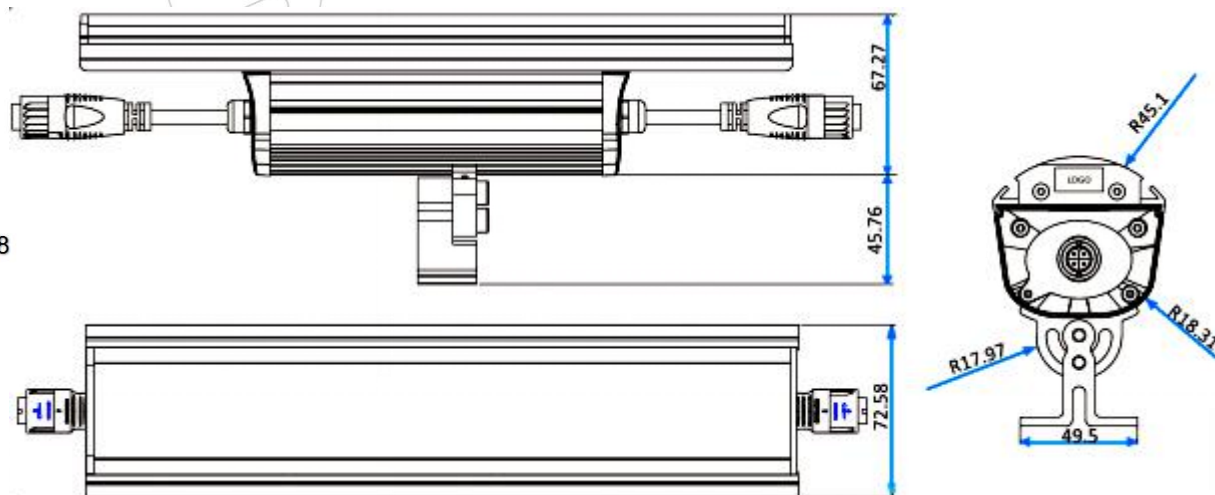

Product Parameters



PRODUCT SPECIFICATION

Wall Washer Details

Model	LED-WW5525-24V3601RGB	LED-WW6269-24V3601RGB	LED-WW8466-24V2401RGB	LED-WW7267-24V3601RGB
Dimension	1012mm*55*25mm	1019mm*62*69mm	1019mm*84*66mm	1000mm*72*67mm
Input Voltage	24V DC	24V DC	24V DC	24V DC
Power	36W	36W	72W	36W
LED QTY	36	36	24	36
LED	Cree LED/ Everlight 1W-3W LED		Edison 3W RGB LED	Cree LED
DMX Driver	DMX 512 high power constant current driver			
Dimming	DMX 512			
Pixel	1	1	1	1
DMX Channel	1-3CH	3CH	3CH	1-3CH
Housing Material	Aluminum base			
Diffuser	Clear Tempered Glass			PC
Temperature	-40°C~+60°C			
Color Range	RGB/Red/Green/Blue/Amber/Pink/White/Warm white			
LED Lens	16°, 30°, 45°, 60°, 20°*40°, 10°*45°, 10°*80°, 20°*60°			
Protection	IP65			IP68
Lifespan	50,000 hours			
Weight	2KG	4.5KG	5KG	5KG

Remark: Specifications are subject to change without notice & Wall washer length and led qty, lens can be customized.

LED- WW 5525 - 24V 3601 RGB

Model Definition

RGB=RGB Mix color,

3601=36led 1 pixel, LED&Pixel qty can be customized

24V=Voltage input, 24V/110V

5525=55mm width, 25mm height without bracket,
choose from 5 525, 6269, 8684, 7267

WW=Wall Washer

LED=ISEELED



Ordering Information



PRODUCT SPECIFICATION

Model No.	Details
Wall Washer	
LED-WW5525-24V3601RGB	1000mm, 12Red, 12Green, 12Blue, 36 leds, tempered glass, 24V DC input, DMX 512, max 45W, IP65
LED-WW5525-24V1801RGB	500mm, 6Red, 6Green, 6Blue, 18 leds, tempered glass, 24V DC input, DMX 512, max 22W, IP65
LED-WW5525-24V2401RGBW	1000mm, 12RGB, 12white, 24 leds, tempered glass, 24V DC input, DMX 512, max 36W, IP65
LED-WW6269-24V3601RGB	1000mm, 12Red, 12Green, 12Blue, 36 leds, tempered glass, 24V DC input, DMX 512, max 45W, IP65
LED-WW6269-24V1801RGB	1000mm, 6Red, 6Green, 6Blue, 18 leds, tempered glass, 24V DC input, DMX 512, max 45W, IP65
LED-WW8466-24V2401RGB	1000mm, 24RGB, 24 3W leds, tempered glass, 24V DC input, DMX 512, max 100W, IP65
LED-WW8466-24V1201RGB	1000mm, 12RGB, 12 3W leds, tempered glass, 24V DC input, DMX 512, max 36W, IP65
LED-WW7267-24V4201RGB-IP68	1200mm, 14Red, 14Green, 14Blue, 42 leds, PC diffuser, 24V DC input, DMX 512, max 100W, IP68
LED-WW7267-24V3601RGB-IP68	1000mm, 12Red, 12Green, 12Blue, 36 leds, PC diffuser, 24V DC input, DMX 512, max 90W, IP68
LED-WW7267-24V1801RGB-IP68	600mm, 6Red, 6Green, 6Blue, 18 leds, PC diffuser, 24V DC input, DMX 512, max 36W, IP68
LED-WW7267-24V901RGB-IP68	300mm, 3Red, 3Green, 3Blue, 9 leds, PC diffuser, 24V DC input, DMX 512, max 18W, IP68
LED-WW7267-24V4001RGBW-IP68	1200mm, 10Red, 10Green, 10Blue, 10white, 40 leds, PC diffuser, 24V DC input, DMX 512, max 100W, IP68
LED-WW7267-24V42W-IP68	1200mm, 42 white led, 42 leds, PC diffuser, 24V DC input, no dimming, max 100W, IP68
LED-WW7267-24V9W-IP68	300mm, 9 white led, 9 leds, PC diffuser, 24V DC input, no dimming, max 18W, IP68
Controller and Power Supply	
HLG-240H-24	Meanwell 240W, DC 24V output, IP65 / IP67
HLG-320H-24	Meanwell 320W, DC 24V output, IP65 / IP67
HLG-320H-24B	Meanwell 320W, DC 24V output, IP65, PWM/1-10V DC / resistance dimming function
LRS-350-24	Meanwell 350W, DC 24V output, indoor
RSP-320-24	Meanwell 320W, DC 24V output, indoor with PFC
LED-01SC	DMX LED Controller, SD card offline, 1* 512 CH
IA-001005	Madrix Plexus, 2*512 DMX CH, Standalone or Online
Cables	
LED-BI(1000)4FB	10M black 4 pin female to bare cable(the bare cable to controller)
LED-BI(300)4M4F	3M black 4 pin male to 4 pin female
LED-BI(100)2FB	1M black 2 pin female to bare cable(the bare cable to Power Supply)

